



**ECOSUN C**  
infrared ceiling cassette

ECOSUN C infrared heating ceiling cassettes provide cost effective, discrete and efficient comfort as either primary or complimentary heating in localised and hard to heat areas.

Designed specifically for easy installation into a suspended ceiling grid, the 300W panel directly replaces one 600mm x 600mm ceiling tile. The 600W panel replaces two 600mm x 600mm ceiling tiles.

Supplied with a mounting bracket for easy installation on to conventional ceilings. Maintenance free, easy to clean with a semi-smooth white finish. For added safety they come complete with a built in thermal cut-out and can easily be controlled using a range of air sensing thermostats.



## Features

- Fully insulated panel to optimise performance and minimise heat losses
- Easy to clean semi smooth white finish
- Fits into standard "T" bar suspended ceiling
- 1.5m heat resistant cable Thermal overload protection

Control options available—(see Ecosun Controls)




**ECOSUN C**  
infrared ceiling cassette

### Technical Detail

- 22 gauge galvanised steel radiating surface with white powder coated finish
- Carbon impregnated glass cloth heating element for excellent heat distribution and long life
- Mounting height 2.4m min - 4.0m max
- Mounting bracket included
- Can be suspended with chains
- Available in 300W and 600W outputs
- Thermal overload protection set at 130oC



### Ceiling Installation

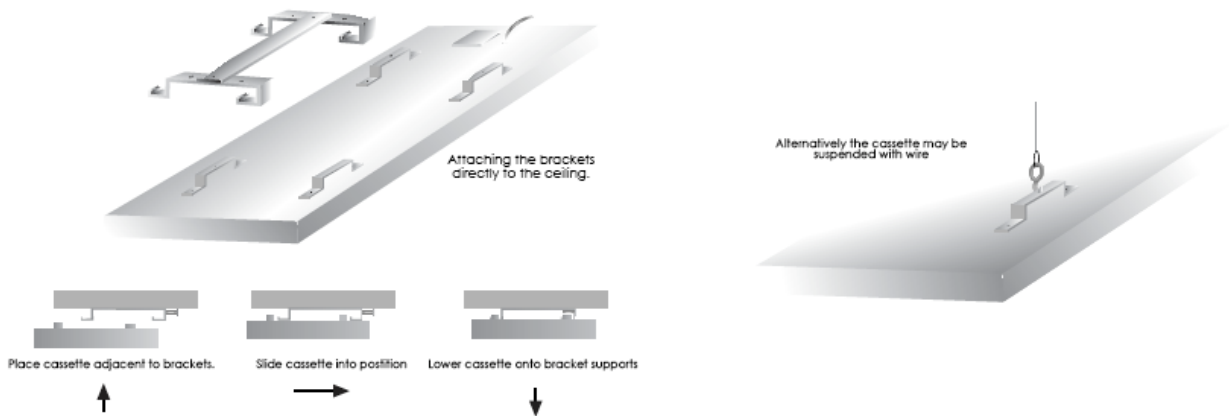

### Product Codes

Product Code	Wattage	Dimensions
HN 3C-300	300	595 X 595 X 25
HN 6C-600	600	1195 X 595 X 25

